




CONCEPT FRAMES INCORPORATED

Steel Stiffened Doors

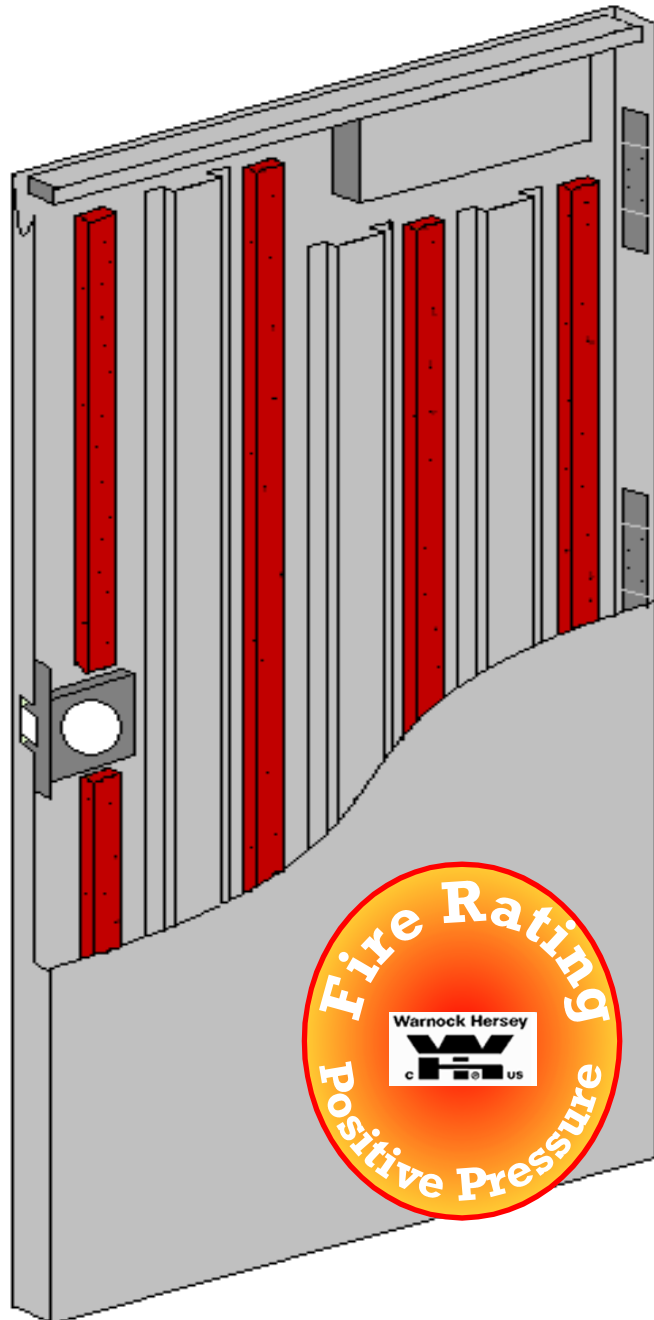

- 16 gauge A60 galvanealed skins
- 22 gauge steel stiffeners welded at each end and to faces of door
- 16 gauge perimeter channels
- 7 gauge hinge reinforcements
- Closer reinforced standard on all doors
- Flush metal topcap standard on all doors
- Space between steel stiffeners filled with fiberglass insulation for sound deadening
- 1 3/4" standard thickness; custom thicknesses available
- Visible edge seam standard; seamless edges available as welded or filled with auto body filler

